

# OPTOELECTRONIC SAFETY GUARDS



**SCHMERSAL**  
THE DNA OF SAFETY

# INTRODUCTION



**Heinz and Philip Schmersal,**  
Managing Directors of the Schmersal Group

## New solutions to improve production efficiency and machine safety

### Safety in system – Protection for man and machine

Often, it is unavoidable that people have to intervene with the workings of a machine. When this is done, the safety of the operator is imperative.

This demands the responsibility of the machine operator, which is also required by the world's standards and guidelines for machine safety.

The Schmersal Group has concentrated for many years on safety at work with our products and solutions; today we can offer the industry the world's largest range of safety switchgear and systems for the protection of man and machine.

Under the guiding principle "Safety with system – protection for man and machine" we develop and produce products that carry the system concept and can be optimally integrated into the work processes. Because we are convinced that safety does not contradict higher productivity.

In our fields of activity we have a leading position due to our expertise, our innovative power and our comprehensive range of products.

With this we follow a central theme: Together with you, we want to make the world safer.

Talk to us – we look forward to working with you.

# CONTENT

Introduction	Page	2
Description	Page	4
Modes of operation and functions	Page	6
Safety distance	Page	8
Overview	Page	9
Safety light barriers	Page	10
Overview	Page	10
Preferred types and accessories	Page	12
Safety light grids / light curtains Type 2	Page	14
Series SLC/SLG 240	Page	14
Safety light grids / light curtains Type 4	Page	16
Series SLC/SLG 440COM/440/445	Page	16
Overview	Page	16
Preferred types	Page	18
EX Safety light grids / light curtains Type 4	Page	20
Overview	Page	20
Preferred types	Page	21
Safety monitoring modules	Page	22
Accessories	Page	24
tec.nicum	Page	28

## Web shop



Already familiar with our new web shop?  
Here you will find all details and data  
on our products which you can order  
directly online:

[products.schmersal.com](http://products.schmersal.com)

# OPTOELECTRONIC SAFETY DEVICES

## DESCRIPTION

### USAGE / SELECTION OF AOPD


In order to choose the appropriate active optoelectronic protective device (AOPD) such as light barriers or light curtains/grids to use them correctly, both the requirements of the standards (EN ISO 13849-1, EN ISO 13855, C standards etc.) and product-specific features (detection sensitivity, range, etc.) must be taken into account.

AOPD's can be used, provided that:

- The dangerous movement can be stopped at all times and that it is ensured that the dangerous area can only be reached after the movement has come to standstill.
- The stopping time for the machine and all safety components used are known.
- No objects (work pieces, liquids, etc.) can be ejected.
- The AOPD meet the requirements of Type 2 or Type 4 acc. to EN 61496.
- The dangerous area can only be reached by passing through the protected field of the AOPD.
- Reaching over, under or through the protected field is impossible.
- The start or restart command devices are fitted in such a way that the entire hazardous area is completely visible from the outside and it cannot be activated from within the hazardous area.
- The safety distance is calculated and constructively applied in accordance with EN ISO 13855.

The effectiveness of the protection equipment is only as good as the risk analysis carried out when designing the system, which took into consideration all the marginal conditions such as surroundings, machine and functional sequences.

### SAFETY LIGHT GRIDS / LIGHT CURTAINS

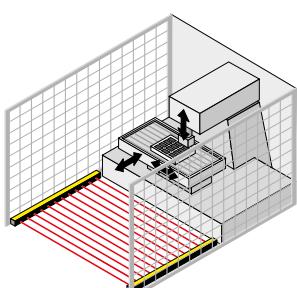

The safety light curtains and safety light grids of the SLC and SLG range meet the requirements of Category type 2 and type 4 according to EN 61496. Typical applications for safety light barriers are on robots, automatic-processing plants, transfer lines, rack storage and pallet loaders. If the light beam is interrupted by an object or a person, a stop signal is emitted to bring the machine to a standstill.

The protection field is defined by the height and width of the protection field. The protected height is the range between the first and last infrared light beam of a light curtain. The protected width or operating range is the distance between the emitter and receiver unit. If the light beam is interrupted, a signal is emitted to bring the dangerous movement of the machine to a standstill.


For the detection of body parts, a distinction is made between finger, hand and body protection. EN ISO 13855 sets the biometric data for finger protection to 14 mm, for hand detection to 30 mm, for leg detection up to 70 mm and for body detection to over 70 mm. Safety light grids are generally used to detect the penetration of the entire human body.

The safety light grids and light curtains can be smoothly connected through a M12 connector plug; they are equipped with a diagnostic interface as well as an LED for status indication. The safety light curtains or light grids feature an integrated safety-monitoring module with start/restart interlock and contactor control. Additional functions such as blanking, muting and a synchronisation function for the light curtains are also available.

Today with Bluetooth® LE an innovative communication interface is available for the diagnosis and inspection of AOPD. The current AOPD data of the SLC440 and SLC440COM series are displayed in real time.



## SAFETY LIGHT CURTAINS WITH BLUETOOTH® INTERFACE BLE

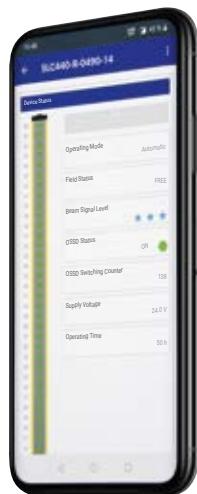

### The App "SLC Assist"

The App gives information about

- Operating mode
- Beam signal level
- OSSD status
- Status of the protective field
- Number of OSSD switches
- Supply voltage
- Operating time

Beam signal level:

★★★ = perfect alignment  
★★☆ = optimisation required

You will define the service cycles for the safety relay module via the OSSD switching counter. The information of the total operating time is the basis for planning the periodic inspection.

### Innovative Technology

The light curtain with Bluetooth® interface and the SCHMERSAL App gives optimal support for

- Condition monitoring
- Optimal alignment
- Preventive maintenance
- Documentation according to industrial safety regulations

The SCHMERSAL App "**SLC Assist**" is available for Android and iOS devices.

More information can be found in the product video.

Product video:



"SLC Assist"  
for iOS


"SLC Assist"  
for Android



# OPTOELECTRONIC SAFETY DEVICES

## MODES OF OPERATION AND FUNCTIONS

### SAFETY LIGHT BARRIERS

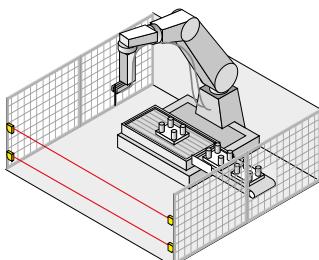

All SLB photoelectric barriers have fail-safe integrated semi-conductor outputs (2 x PNP) and can be incorporated directly in the safety circuit without external safety monitoring. The new product family meets the requirements of all type 2 or type 4 applications in accordance with EN 61496. The safety photoelectric barriers are distinguished by extremely small dimensions which means that they can be well placed in the surrounding structure and can also be mounted easily and quickly even in tight spaces. Both models have a range of 15 metres. The SLB 440...-H model features a range of up to 75 metres and, as an option, has integrated heating for use in minus temperatures.

Single beam photoelectric barriers are particularly suitable for safeguarding smaller hazardous areas – such as machines with small openings or slots.

With this set of features, the new photoelectric barriers can be deployed in numerous ways – for example in work areas where assembly and material handling technology is used as well as in the wood, paper and print industry. Other areas of application are (semi) automated shelving and commissioning systems, high shelf warehouses and packaging machines as well as for confining work areas of man and machine. It can also be used in outside areas, for example in the wood and cement industry, in gravel pits or in harbours/ports.

### OPERATING MODES



Double reset

The operating modes of an AOPD must be defined according to the risk analysis of a machine.

#### Automatic / Protective mode

The protective mode switches the AOPD outputs to an ON state (protection field not interrupted), without external release of a switching device. This mode of operation creates an automatic machine restart if the protection field is not interrupted and should only be selected with the restart interlock of the machine.

#### Restart interlock (manual reset)

The restart interlock (manual reset) prevents an automatic enabling of the outputs (OSSD's ON state) after switch-on of the operating voltage or an interruption of the protection field. The system switches the outputs only to an ON state, when an external command device generates an enabling signal at the restart input (receiver).

#### Restart interlock with double acknowledgement/reset


In applications with access monitoring, a complete overview of the hazardous areas is often not possible; despite that, a reset of the command device for the restart interlock outside of the hazardous area by third parties is enabled at all times. This hazardous situation of an unexpected start-up can be avoided by means of a double reset, i.e. integration of one command device inside and one outside the hazardous area.

#### Setting mode

Before commissioning an AOPD, the best possible alignment of the sensors should be determined. The set-up mode visualises the set-up quality during the installation of the sensors. Visualisation is via a 7-segment display, a status display or optionally via a smartphone with the "SLC Assist" app.



## OBJECT BLANKING

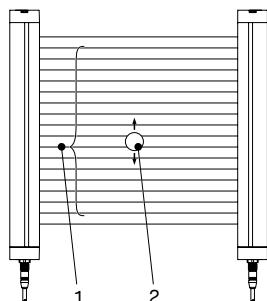


1 Object blanking area  
2 Movable object

For safe production, object blanking can be used to blank just part of the protection field. This makes it possible to add objects, e.g. workpieces, or position a conveyor belt with a fixed position in the protection field.

With integrated movable object blanking (floating blanking) of the SLC440/445 light curtains, up to 2 light beams of the light curtain can be blanked flexibly. This function is required if there is a need to be able to interrupt light beams in the protection field at a position that is not specifically defined.

Different blanking functions are available. The distinguishing feature of the different modes is the number of light beams that can be interrupted by an object. In addition to that, it can be defined whether the object may be in the protection field permanently or only temporarily. The interrupted light beams can be at any position in the protection field.

## MUTING

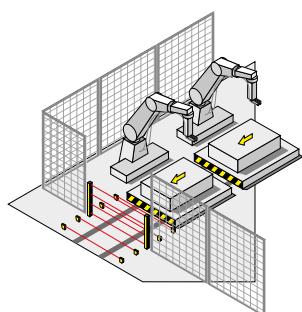

If goods or objects need to be transported in or out of the hazardous area without stopping the machine, the safety light curtain must be automatically and temporarily suspended. Two or four muting signals are used to detect whether a person is approaching the hazardous area or a transport system is entering or leaving the hazardous area. Suitable muting inputs are light barriers, proximity switches or position switches.

The integrated safety-muting controller of the safety light curtain or light grid monitors and controls the muting process. The safety outputs are not disabled. Depending on the application, different light barriers with integrated muting functions are available.

# OPTOELECTRONIC SAFETY DEVICES

## SAFETY DISTANCE

### SAFETY DISTANCE


The stopping time for the complete system and the resolution capacity of the AOPD essentially determines the required safety distance of the AOPD to the dangerous area. The safety light grid or light curtain must be sized and installed so that a stop signal would be transmitted and the hazard ceased prior to a person or a body part accessing the danger zone.

The standard EN ISO 13855 provides the user with detailed information about the calculation of the minimum safety distances. These include the following important influencing factors:

- Stopping time of the entire system, taking the different reaction times of the individual systems into account (e.g. machine, safety relay module, AOPD etc.)
- Detection capability of the AOPD to detect body parts (finger, hand and whole body)
- Arrangement of each protection device in the normal position (vertical mounting), parallel orientation (horizontal mounting) or at any angle in front of the guard system
- Approach speed to the protection field

For the calculation of the minimum safety distance **S** to the hazardous area, EN ISO 13855 presents the following general formula:

$$S = K \times T + C$$

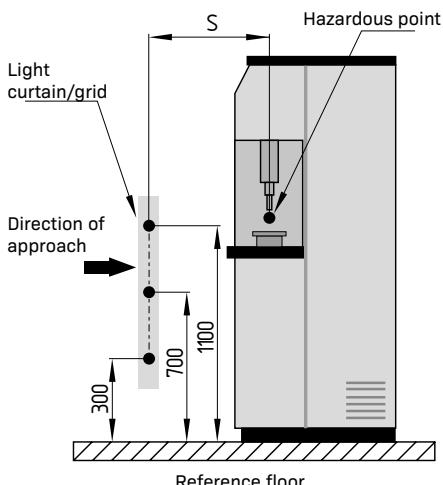

Key:

**S** the safety distance to the hazardous area (mm)

**K** the approach speed of the body or the body part (mm/s)

**T** total reaction time of the system (s)  
(inc. machine run-on time, reaction time of the safety guard and the safety relay module, etc.)

**C** additional distance (mm) before the safety guard

If access to the hazardous area (by passing across the protection field) cannot be excluded by using vertically mounted contactless protective equipment such as a light grid, an additional minimum distance CRO should be considered.

This distance is dependent on the protection field height above the ground and the position of the hazardous area (EN ISO 13855).

# OPTOELECTRONIC SAFETY DEVICES OVERVIEW

Selection	Type to EN 61496	Special features	Series	refer to
Safety light barriers SLB	Type 2	Range to 15 m	SLB240	Page 10
	Type 4	Range to 15 m	SLB440	
		SLB440 IP69	SLB440 IP69	
		Range to 75 m	SLB440-H	
			SLB440-H IP69	
Safety light curtains SLC	Type 2	Compact	SLC240COM	Page 14
	Type 4	Compact	SLC440COM	
		High degree of protection	SLC440COM – PH enclosure	
		Included in standard version	SLC440	
		High degree of protection	SLC440 – SH/PH enclosure	
		Multifunctional	SLC445	
		Ex-Zone 1 and 21	EX-SLC440	
Safety light grids SLG	Type 2	Compact	SLG240COM	Page 14
	Type 4	Compact	SLG440COM	
		High degree of protection	SLG440COM – PH enclosure	
		Included in standard version	SLG440	
		High degree of protection	SLG440 – SH/PH enclosure	
		Multifunctional	SLG445	
		Ex-Zone 1 and 21	EX-SLG440	

# SAFETY LIGHT BARRIERS

## RANGE SLB – OVERVIEW



■ SLB240



■ SLB440

### Key Features

- Safety light barrier type 2
- 4-stage coding
- Integrated evaluation

- Safety light barrier type 4
- 4-stage coding
- Integrated evaluation

### Technical features

<b>Range of the protection field</b>	15 m	15 m
<b>Min. object size</b>	Ø 10 mm	Ø 10 mm
<b>Wave length of the sensors</b>	880 nm	880 nm
<b>Electrical characteristics</b>		
<b>Response time</b>	7 ... 22 ms	7 ... 22 ms
<b>Automatic/restart interlock</b>	■	■
<b>Rated operating voltage Ue</b>	24 VDC ± 10%	24 VDC ± 10%
<b>Safety outputs</b>	2 x OSSD	2 x OSSD
<b>Mechanical data</b>		
<b>Material of the housings</b>	Aluminium	Aluminium
<b>Termination</b>	ST: Connector plug M12 LST: 20 cm Cable with connector M12	ST: Connector plug M12 LST: 20 cm Cable with connector M12
<b>Connector plug (transmitter/receiver)</b>	4-pole / 5-pole	4-pole / 5-pole
<b>Cable length</b>	Max. 100 m	Max. 100 m
<b>Dimensions (H x W x L)</b>	ST: 28 x 91 x 33 mm LST: 28 x 72 x 33 mm	ST: 28 x 91 x 33 mm LST: 28 x 72 x 33 mm
<b>Ambient conditions</b>		
<b>Ambient temperature</b>	-30 °C ... +50 °C	-30 °C ... +50 °C
<b>Degree of protection</b>	IP67	IP67
<b>Recommended safety-monitoring module for the series wiring</b>	SRB-E-204ST	SRB-E-204ST

### Safety classification

<b>Standards</b>	EN ISO 13849-1 EN 62061	EN ISO 13849-1 EN 62061
<b>PL/SIL</b>	c/2	e/3
<b>Control category</b>	2	4
<b>PFH</b>	$1.5 \times 10^{-8} /h$	$1.5 \times 10^{-8} /h$
<b>Certificates</b>	TÜV, UL	TÜV, UL



To get detailed information about the products and certificates, visit [products.schmersal.com](http://products.schmersal.com).



■ SLB440-H



■ SLB440(-H) IP69

- |   |  |
|---|--|
| <ul style="list-style-type: none"> <li>Safety light barrier type 4</li> <li>4-stage coding</li> <li>Integrated evaluation</li> <li>Optional heater</li> </ul> | <ul style="list-style-type: none"> <li>Safety light barrier type 4</li> <li>Hygiene-compliant protective enclosure</li> <li>4-stage coding</li> <li>Integrated evaluation</li> </ul> |
|---|--|

75 m	15 / 75 m
Ø 70 mm	Ø 10 / 70 mm
880 nm	880 nm
7 ... 22 ms	7 ... 22 ms
■	■
24 VDC ± 10%	24 VDC ± 10%
2 x OSSD	2 x OSSD
Aluminium	Polycarbonate / Stainless steel
ST: Connector plug M12 LST: 20 cm Cable with connector M12	LST: 20 cm Cable with connector M12
4-pole / 5-pole	4-pole / 5-pole
Max. 100 m	Max. 100 m
ST: 28 x 131 x 33 mm LST: 28 x 111 x 33 mm	62 x 115 mm 62 x 155 mm (-H)
-30 °C ... +50 °C	-30 °C ... +50 °C
IP67	IP69
SRB-E-204ST	SRB-E-204ST

EN ISO 13849-1 EN 62061	EN ISO 13849-1 EN 62061
e/3	e/3
4	4
1.5 x 10 <sup>-8</sup> /h TÜV, UL	1.5 x 10 <sup>-8</sup> /h TÜV, UL

# SAFETY LIGHT BARRIERS

## RANGE SLB – PREFERRED TYPES AND ACCESSORIES

Type	Range	Type	Termination	Type	Material number
Safety light barriers	SLB240	Coding 1*	Connector plug	SLB240-ER-1-ST	103013801
			Cable with connector	SLB240-ER-1-LST	103013529
	SLB440	Coding 1*	Connector plug	SLB440-ER-1-ST	103019521
			Cable with connector	SLB440-ER-1-LST	103013525
	SLB440-H	Coding 1*	Connector plug	SLB440-ER-1-ST-H	103015483
			Cable with connector	SLB440-ER-1-LST-H	103015487
			Connector plug	SLB440-ER-1-ST-H-EH	103015491
			Cable with connector	SLB440-ER-1-LST-H-EH	103015497
	SLB440(-H) IP69	Coding 1*	Cable with connector	SLB440-ER-1-LST-1047	103041245
			Cable with connector	SLB440-ER-1-LST-H-1047	103041248

\*Other coding available.

Connector plug	Parametrisation cable KA-0977 103013625	Mounting kits MS-...
 <ul style="list-style-type: none"> <li>■ Connector plug M12, straight, 4 pole            5 m KA-0804            10 m KA-0805            20 m KA-0808</li> <li>■ Connector plug M12, straight, 5 pole            5 m A-K5P-M12-S-G-5M-BK-2-X-A-4-69            10 m A-K5P-M12-S-G-10M-BK-2-X-A-4-69            15 m A-KSP-M12-S-G-15M-BK-2-X-A-4-69</li> </ul>	 <ul style="list-style-type: none"> <li>■ Parametrisation cable for SLB series</li> <li>■ Y-splitter, M12, 5-pole with P-button</li> </ul>	 <ul style="list-style-type: none"> <li>■ Assembly sets for SLB series</li> <li>■ For SLB240 / SLB440            (qty. 2 brackets, qty. 4 screws) MS-1101</li> <li>■ For SLB440-H            (qty. 4 brackets, qty. 8 screws) MS-1100</li> </ul>

Detailed information for the selection of accessories can be found at [products.schmersal.com](http://products.schmersal.com).

## **UP-TO-DATE WITHOUT FAIL**


### ONLINE PRODUCT CATALOGUE



**FOR DETAILED INFORMATION, CHECK OUT  
[PRODUCTS.SCHMERSAL.COM](http://PRODUCTS.SCHMERSAL.COM)**

# SAFETY LIGHT GRIDS AND CURTAINS

## TYPE 2 – RANGE 240COM – OVERVIEW

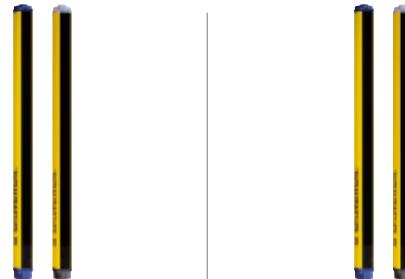

Key Features		■ SLC240COM	■ SLG240COM
		<ul style="list-style-type: none"> <li>▪ Safety light curtain</li> <li>▪ Compact</li> </ul>	<ul style="list-style-type: none"> <li>▪ Safety light grid</li> <li>▪ Compact</li> </ul>
Technical features			
<b>Resolution</b>	14, 30, 35 mm	300, 400 or 500 mm	
<b>Protection heights</b>	330 mm ... 1930 mm	500, 800 or 900 mm	
<b>Number of beams</b>	11 ... 192	2, 3 or 4 beams	
<b>Range of the protection field</b>	0.3 ... 12 m	0.3 ... 12 m	
<b>Operating modes</b>			
- Protective mode / Automatic	■	■	
- Restart interlock (manual reset)	■	■	
- Parameter setting	KA-0896	KA-0896	
<b>Functions integrated</b>			
- Contactor control	-	-	
- Blanking of objects	■	■	
- Muting	-	-	
- Cyclic function	-	-	
- Further functions (see key)	DM, RS	DM, RS	
<b>Electrical characteristics</b>			
<b>Operating voltage</b>	24 VDC ± 10%	24 VDC ± 10%	
<b>Safety output OSSD, 24 VDC</b>	2 x PNP (timing)	2 x PNP (timing)	
<b>Response time OSSD</b>	10 ... 28 ms	10 ms	
<b>Switching capacity OSSD</b>	500 mA	500 mA	
<b>LED status display, 7-segment display</b>	Status display	Status display	
<b>Mechanical data</b>			
<b>Execution of the electrical connection</b>	Connector plug	Connector plug	
<b>Connector plug (transmitter/receiver)</b>	4-pole / 5-pole	4-pole / 5-pole	
<b>Dimensions <sup>1)</sup></b>	27.8 x 33 mm	27.8 x 33 mm	
<b>Ambient conditions</b>			
<b>Ambient temperature</b>	-10 °C ... +50 °C	-10 °C ... +50 °C	
<b>Degree of protection</b>	IP67	IP67	
Safety classification			
<b>Standards</b>	EN ISO 13849-1, EN 62061	EN ISO 13849-1, EN 62061	
<b>PL/SIL</b>	c/1	c/1	
<b>Control category</b>	2	2	
<b>PFH</b>	$8.05 \times 10^{-9} /h$	$8.05 \times 10^{-9} /h$	
<b>Certificates</b>	TÜV, UL, EAC	TÜV, UL, EAC	



Type to EN 61496	Type	Range	Resolution	Protection heights	Range	Type	Material number
Type 2	Safety light curtain SLC	SLC240COM	14 mm	330 ... 1930 mm	0,3 ... 7 m	SLC240COM-ER-xxxx-14	---
			30 mm	330 ... 1930 mm	0,3 ... 12 m	SLC240COM-ER-xxxx-30	---
			35 mm	330 ... 1930 mm	0,3 ... 7 m	SLC240COM-ER-xxxx-35	---
	Safety light grids SLG	SLG240COM	2 beams	500 mm	0,3 ... 12 m	SLG240COM-ER-0500-02	103016120
			3 beams	800 mm	0,3 ... 12 m	SLG240COM-ER-0800-03	103016122
			4 beams	900 mm	0,3 ... 12 m	SLG240COM-ER-0900-04	103016127

**xxxx** = For different heights and other combinations, see [products.schmersal.com](http://products.schmersal.com).

--- = The material number is dependent on the protective field heights.

<sup>1)</sup> The height depends on the protection field height

#### Key

BC = Beam coding  
 DQ = Double acknowledgement/reset  
 MS = Multiple scan  
 DM = Setting mode  
 SI = Start interlock  
 RS = Series-wiring

To get detailed information about the products and certificates, visit [products.schmersal.com](http://products.schmersal.com).

# SAFETY LIGHT GRIDS AND CURTAINS

## TYPE 4 – RANGE 440COM/440/445 – OVERVIEW



### Key Features

■ SLC440COM	■ SLC440	■ SLC445
-------------	----------	----------

▪ Safety light curtain

▪ Compact

▪ Integrated Bluetooth  
LE interface

▪ Safety light curtain

▪ Standard

▪ Integrated Bluetooth  
LE interface

▪ Safety light curtain

▪ Multifunctional

### Other versions

AS-i SaW

–

■<sup>1)</sup>

–

### Technical features

<b>Resolution</b>	14, 30, 35 mm	14, 30 mm	14, 30 mm
<b>Protection heights</b>	330 mm ... 1930 mm	170 mm ... 1930 mm	170 mm ... 1770 mm
<b>Number of beams</b>	11 ... 192	8 ... 192	8 ... 144
<b>Range of the protection field</b>	0.3 ... 10 m, 8 ... 30 m <sup>4)</sup>	0.3 ... 20 m	0.3 ... 10 m
<b>Operating modes</b>			
- Protective mode / Automatic	■	■	■
- Restart interlock (manual reset)	■	■	■
- Parameter setting	Wiring	KA-0974	KA-0976
<b>Functions integrated</b>			
- Contactor control	–	■	■
- Blanking of objects	–	■	■
- Muting	–	–	■
- Cyclic function	–	–	■
- Further functions (see key)	DM	BC, DQ, DM	BC, DQ, MS, DM
<b>Electrical characteristics</b>			
<b>Operating voltage</b>	24 VDC ± 10%	24 VDC ± 10%	24 VDC ± 10%
<b>Safety output OSSD, 24 VDC</b>	2 x PNP (timing)	2 x PNP (timing)	2 x PNP (timing)
<b>Response time OSSD</b>	10 ... 28 ms	10 ... 28 ms	10 ... 27 ms
<b>Switching capacity OSSD</b>	500 mA	500 mA	500 mA
<b>LED status display, 7-segment display</b>	Status display	7-segment display	7-segment display
<b>Mechanical data</b>			
<b>Execution of the electrical connection</b>	Connector plug	Connector plug	Connector plug
<b>Connector plug (transmitter/receiver)</b>	4-pole / 5-pole	4-pole / 8-pole	4-pole / 12-pole
<b>Dimensions<sup>2)</sup></b>	27.8 x 33 mm	27.8 x 33 mm	27.8 x 33 mm
<b>Ambient conditions</b>			
<b>Ambient temperature</b>	-10 °C ... +50 °C	-25 °C ... +50 °C	-25 °C ... +50 °C
<b>Degree of protection</b>	IP67	IP67	IP67

### Safety classification

<b>Standards</b>	EN ISO 13849-1, EN 62061	EN ISO 13849-1, EN 62061	EN ISO 13849-1, EN 62061
<b>PL/SIL</b>	e/3	e/3	e/3
<b>Control category</b>	4	4	4
<b>PFH</b>	8.05 x 10 <sup>-9</sup> /h	5.14 x 10 <sup>-9</sup> /h	5.14 x 10 <sup>-9</sup> /h
<b>Certificates</b>	TÜV, UL, EAC	TÜV, UL, EAC	TÜV, UL, EAC





■ SLG440COM ■ SLG440 ■ SLG445 ■ 440/COM IP69

▪ Safety light grid ▪ Compact ▪ Integrated Bluetooth LE interface	▪ Safety light grid ▪ Standard ▪ Integrated Bluetooth LE interface	▪ Safety light grid ▪ Multifunctional	▪ Safety light curtain SLC/light grid SLG ▪ Compact ▪ Integrated Bluetooth LE interface
-	■ <sup>1)</sup>	-	-
300, 400 or 500 mm 500, 800 or 900 mm 2, 3 or 4 beams 0.3 ... 12 m, 8 ... 60 m	300, 400 or 500 mm 500, 800 or 900 mm 2, 3 or 4 beams 0.3 ... 20 m	300, 400 or 500 mm 500, 800 or 900 mm 2, 3 or 4 beams 0.3 ... 20 m	14 ... 500 mm 170 mm ... 1770 mm 8 ... 192 0.3 ... 20 m
■ ■ Wiring	■ ■ KA-0974	■ ■ KA-0976	■ ■ Wiring
- - - -	■ ■ - -	■ ■ - ■	■ ■ - -
DM	BC, DQ, DM	BC, DQ, MS, DM	BC, DQ, DM
24 VDC ± 10% 2 x PNP (timing) 10 ms 500 mA	24 VDC ± 10% 2 x PNP (timing) 10 ... 15 ms 500 mA	24 VDC ± 10% 2 x PNP (timing) 10 ... 15 ms 500 mA	24 VDC ± 10% 2 x PNP (timing) 10 ... 28 ms 500 mA
Status display	7-segment display	7-segment display	7-segment display
Connector plug 4-pole / 5-pole 27.8 x 33 mm	Connector plug 4-pole / 8-pole 27.8 x 33 mm	Connector plug 4-pole / 12-pole 27.8 x 33 mm	Connector plug 4-pole / 8-pole Ø 50 mm
-10 °C ... +50 °C IP67	-25 °C ... +50 °C IP67	-25 °C ... +50 °C IP67	-10/-25 °C ... +50 °C IP69

<sup>1)</sup> SLC/SLG440-AS versions without BLE available with AS-i SaW interface

<sup>2)</sup> The height depends on the protection field height

<sup>3)</sup> Bluetooth LE is integrated from version 3.0 onwards

<sup>4)</sup> Range 8 ... 30 m for resolution 30 mm

#### Key

BC = Beam coding

DQ = Double acknowledgement/reset

MS = Multiple scan

DM = Setting mode

SI = Start interlock

To get detailed information about the products and certificates, visit [products.schmersal.com](http://products.schmersal.com).

## SAFETY LIGHT GRIDS AND CURTAINS

### TYPE 4 – RANGE 440COM/440/445 – PREFERRED TYPES

Type to EN 61496	Safety	Feature	Series	Special features
Type 4	Light curtain SLC	Compact	SLC440COM	Compact
				High range
				High protection class / Compact + Protective enclosure
		Included in standard version	SLC440	Included in standard version
				Integrated status display
	Light grids SLG	Compact	SLG440COM	High range and integrated status display
				High protection class / SLC440 + Protective enclosure
		AS-i	SLC440AS	Integrated AS-i SaW
				Muting cyclic operation with multiscan
		Included in standard version	SLG440	Compact
				High range
				High protection class / Compact + Protective enclosure
				Included in standard version
				High range
		Multifunctional	SLG445	Integrated status display
				High range and integrated status display
				High protection class / SLG440 + Protective enclosure
		AS-i	SLG440AS	Integrated AS-i SaW
				Muting cyclic operation with multiscan

xxxx = For different heights and other combinations, see [products.schmersal.com](http://products.schmersal.com).

--- = The material number is dependent on the protective field heights.

	<b>Resolution</b>	<b>Protection heights</b>	<b>Range</b>	<b>Type</b>	<b>Material number</b>
sure PH	14 mm	330 ... 1930 mm	0,3 ... 7 m	<b>SLC440COM-ER-xxxx-14</b>	---
	30 mm	330 ... 1930 mm	0,3 ... 10 m	<b>SLC440COM-ER-xxxx-30</b>	---
	35 mm	330 ... 1930 mm	0,3 ... 7 m	<b>SLC440COM-ER-xxxx-35</b>	---
	30 mm	330 ... 1930 mm	8 ... 30 m	<b>SLC440COM-ER-xxxx-30-H</b>	---
				<b>SLC440COM-ER-xxxx-xx</b>	---
	14 mm	170 ... 1930 mm	0,3 ... 7 m	<b>SLC440-ER-xxxx-14</b>	---
ure PH/SH	30 mm	170 ... 1930 mm	0,3 ... 10 m	<b>SLC440-ER-xxxx-30</b>	---
	14 mm	170 ... 1930 mm	0,3 ... 7 m	<b>SLC440-ER-xxxx-14-01</b>	---
	30 mm	170 ... 1930 mm	0,3 ... 10 m	<b>SLC440-ER-xxxx-30-01</b>	---
	14 mm	170 ... 1930 mm	3 ... 10 m	<b>SLC440-ER-xxxx-14-H1</b>	---
	30 mm	170 ... 1930 mm	4 ... 20 m	<b>SLC440-ER-xxxx-30-H1</b>	---
				<b>SLC440-ER-xxxx-xx-01</b>	---
sure PH	14 mm	170 ... 1450 mm	0,3 ... 7 m	<b>SLC440AS-ER-xxxx-14</b>	---
	30 mm	170 ... 1770 mm	0,3 ... 10 m	<b>SLC440AS-ER-xxxx-30</b>	---
	14 mm	170 ... 1450 mm	0,3 ... 7 m	<b>SLC445-ER-xxxx-14-01</b>	---
	30 mm	170 ... 1770 mm	0,3 ... 10 m	<b>SLC445-ER-xxxx-30-01</b>	---
	2 beams	500 mm	0,3 ... 12 m	<b>SLG440COM-ER-0500-02</b>	<b>103004060</b>
	3 beams	800 mm	0,3 ... 12 m	<b>SLG440COM-ER-0800-03</b>	<b>103004063</b>
ure PH/SH	4 beams	900 mm	0,3 ... 12 m	<b>SLG440COM-ER-0900-04</b>	<b>103004064</b>
	2 beams	500 mm	8 ... 60 m	<b>SLG440COM-ER-0500-02-H</b>	<b>103054126</b>
	3 beams	800 mm	8 ... 60 m	<b>SLG440COM-ER-0800-03-H</b>	<b>103054127</b>
	4 beams	900 mm	8 ... 60 m	<b>SLG440COM-ER-0900-04-H</b>	<b>103054128</b>
				<b>SLG440COM-ER-xxxx-xx</b>	---
	2 beams	500 mm	0,3 ... 12 m	<b>SLG440-ER-0500-02</b>	<b>101216818</b>
sure PH	3 beams	800 mm	0,3 ... 12 m	<b>SLG440-ER-0800-03</b>	<b>101216819</b>
	4 beams	900 mm	0,3 ... 12 m	<b>SLG440-ER-0900-04</b>	<b>101216820</b>
	2 beams	500 mm	4 ... 20 m	<b>SLG440-ER-0500-02-H</b>	<b>103009186</b>
	3 beams	800 mm	4 ... 20 m	<b>SLG440-ER-0800-03-H</b>	<b>103009187</b>
	4 beams	900 mm	4 ... 20 m	<b>SLG440-ER-0900-04-H</b>	<b>103009188</b>
	2 beams	500 mm	0,3 ... 12 m	<b>SLG440-ER-0500-02-01</b>	<b>101216821</b>
ure PH/SH	3 beams	800 mm	0,3 ... 12 m	<b>SLG440-ER-0800-03-01</b>	<b>101216822</b>
	4 beams	900 mm	0,3 ... 12 m	<b>SLG440-ER-0900-04-01</b>	<b>101216823</b>
	2 beams	500 mm	4 ... 20 m	<b>SLG440-ER-0500-02-H1</b>	<b>103009189</b>
	3 beams	800 mm	4 ... 20 m	<b>SLG440-ER-0800-03-H1</b>	<b>103009190</b>
	4 beams	900 mm	4 ... 20 m	<b>SLG440-ER-0900-04-H1</b>	<b>103009191</b>
				<b>SLG440-ER-xxxx-xx-01</b>	---
ure PH	2 beams	500 mm	0,3 ... 12 m	<b>SLG440AS-ER-0500-02</b>	<b>103007551</b>
	3 beams	800 mm	0,3 ... 12 m	<b>SLG440AS-ER-0800-03</b>	<b>103007554</b>
	4 beams	900 mm	0,3 ... 12 m	<b>SLG440AS-ER-0900-04</b>	<b>103007557</b>
	2 beams	500 mm	0,3 ... 12 m	<b>SLG445-ER-0500-02-01</b>	<b>103005424</b>
	3 beams	800 mm	0,3 ... 12 m	<b>SLG445-ER-0800-03-01</b>	<b>103005425</b>
	4 beams	900 mm	0,3 ... 12 m	<b>SLG445-ER-0900-04-01</b>	<b>103005426</b>
ure PH/SH	2, 3, 4 beams	500 ... 900 mm	3 ... 20 m	<b>SLG445-ER-xxxx-xx-H1</b>	---

# EX SAFETY LIGHT GRIDS AND CURTAINS

## TYPE 4 – RANGE 440 – OVERVIEW



■ EX-SLC440



■ EX-SLG440

### Key Features

- Safety light curtain
- EX Zone 1 and 21
- Range 20 m
- Safety light grid
- EX Zone 1 and 21
- Range 20 m

### Technical features

<b>Resolution</b>	14, 30 mm	300, 400 or 500 mm
<b>Protection heights</b>	330 mm ... 1370 mm	500, 800 or 900 mm
<b>Number of beams</b>	16 ... 136	2 ... 4
<b>Range of the protection field</b>	0.3 ... 20 m	0.3 ... 20 m
<b>Operating modes</b>		
- Protective mode / Automatic	■	■
- Restart interlock (manual reset)	■	■
- Parameter setting	KA-0974	KA-0974
<b>Functions integrated</b>		
- Contactor control	■	■
- Blanking of objects	■	■
- Muting	–	–
- Cyclic function	–	–
- Further functions (see key)	BC, DQ, DM	BC, DQ, DM
<b>Electrical characteristics</b>		
<b>Operating voltage</b>	24 VDC ± 10%	24 VDC ± 10%
<b>Safety output OSSD, 24 VDC</b>	2 x PNP (timing)	2 x PNP (timing)
<b>Response time OSSD</b>	10 ... 27 ms	10 ... 27 ms
<b>Switching capacity OSSD</b>	500 mA	500 mA
<b>LED status display, 7-segment display</b>	7 segment display	7 segment display
<b>Mechanical data</b>		
<b>Execution of the electrical connection</b>	Connector plug	Connector plug
<b>Connector plug (transmitter/receiver)</b>	4-pole / 8-pole	4-pole / 8-pole
<b>Dimensions <sup>1)</sup></b>	top: Ø 74 mm, bottom: Ø 100 mm	top: Ø 74 mm, bottom: Ø 100 mm
<b>Ambient conditions</b>		
<b>Ambient temperature</b>	-20 °C ... +50 °C	-20 °C ... +50 °C
<b>Degree of protection</b>	IP66	IP66

### Safety classification

<b>Standards</b>	EN ISO 13849-1, EN 62061	EN ISO 13849-1, EN 62061
<b>PL/SIL</b>	e/3	e/3
<b>Control category</b>	4	4
<b>PFH</b>	5.14 x 10 <sup>-9</sup> /h	5.14 x 10 <sup>-9</sup> /h
<b>Certificates</b>	ATEX	ATEX

### Explosion protection

<b>Standards</b>	EN IEC 60079-0, EN IEC 60079-1, EN IEC 60079-31, EN IEC 60079-28	EN IEC 60079-0, EN IEC 60079-1, EN IEC 60079-31, EN IEC 60079-28
<b>Explosion protection zones</b>	1 / 21	1 / 21
<b>Explosion protection designation</b>	⊕ II 2G Ex db op is IIA T6 Gb ⊕ II 2D Ex op is tb IIIC T80°C Db	⊕ II 2G Ex db op is IIA T6 Gb ⊕ II 2D Ex op is tb IIIC T80°C Db



# EX SAFETY LIGHT GRIDS AND CURTAINS

## TYPE 4 – RANGE 440 – PREFERRED TYPES

Type to EN 61496	Type	Range	Special features	Resolution	Protection heights	Range	Type	Material number
Type 4	Safety light curtain <b>EX-SLC</b>	EX- SLC440		14 mm	330 mm	0.3 ... 7 m	<b>EX-SLC440-ER-0330-14</b>	<b>103047644</b>
			High range	14 mm	330 mm	3 ... 10 m	<b>EX-SLC440-ER-0330-14-H</b>	<b>103047651</b>
				30 mm	330 mm	0.3 ... 10 m	<b>EX-SLC440-ER-0330-30</b>	<b>103047629</b>
			High range	30 mm	330 mm	4 ... 20 m	<b>EX-SLC440-ER-0330-30-H</b>	<b>103047637</b>
				14 mm	490 mm	0.3 ... 7 m	<b>EX-SLC440-ER-0490-14</b>	<b>103047645</b>
			High range	14 mm	490 mm	3 ... 10 m	<b>EX-SLC440-ER-0490-14-H</b>	<b>103047652</b>
				30 mm	490 mm	0.3 ... 10 m	<b>EX-SLC440-ER-0490-30</b>	<b>103047631</b>
			High range	30 mm	490 mm	4 ... 20 m	<b>EX-SLC440-ER-0490-30-H</b>	<b>103047638</b>
				14 mm	650 mm	0.3 ... 7 m	<b>EX-SLC440-ER-0650-14</b>	<b>103047646</b>
			High range	14 mm	650 mm	3 ... 10 m	<b>EX-SLC440-ER-0650-14-H</b>	<b>103047653</b>
				30 mm	650 mm	0.3 ... 10 m	<b>EX-SLC440-ER-0650-30</b>	<b>103047632</b>
			High range	30 mm	650 mm	4 ... 20 m	<b>EX-SLC440-ER-0650-30-H</b>	<b>103047639</b>
				14 mm	810 mm	0.3 ... 7 m	<b>EX-SLC440-ER-0810-14</b>	<b>103047647</b>
			High range	14 mm	810 mm	3 ... 10 m	<b>EX-SLC440-ER-0810-14-H</b>	<b>103047654</b>
				30 mm	810 mm	0.3 ... 10 m	<b>EX-SLC440-ER-0810-30</b>	<b>103047633</b>
			High range	30 mm	810 mm	4 ... 20 m	<b>EX-SLC440-ER-0810-30-H</b>	<b>103047640</b>
				14 mm	970 mm	0.3 ... 7 m	<b>EX-SLC440-ER-0970-14</b>	<b>103047648</b>
			High range	14 mm	970 mm	3 ... 10 m	<b>EX-SLC440-ER-0970-14-H</b>	<b>103047655</b>
				30 mm	970 mm	0.3 ... 10 m	<b>EX-SLC440-ER-0970-30</b>	<b>103047634</b>
			High range	30 mm	970 mm	4 ... 20 m	<b>EX-SLC440-ER-0970-30-H</b>	<b>103047641</b>
				14 mm	1130 mm	0.3 ... 7 m	<b>EX-SLC440-ER-1130-14</b>	<b>103047649</b>
			High range	14 mm	1130 mm	3 ... 10 m	<b>EX-SLC440-ER-1130-14-H</b>	<b>103047656</b>
				30 mm	1130 mm	0.3 ... 10 m	<b>EX-SLC440-ER-1130-30</b>	<b>103047635</b>
			High range	30 mm	1130 mm	4 ... 20 m	<b>EX-SLC440-ER-1130-30-H</b>	<b>103047642</b>
				14 mm	1370 mm	0.3 ... 7 m	<b>EX-SLC440-ER-1370-14</b>	<b>103047650</b>
			High range	14 mm	1370 mm	3 ... 10 m	<b>EX-SLC440-ER-1370-14-H</b>	<b>103047657</b>
				30 mm	1370 mm	0.3 ... 10 m	<b>EX-SLC440-ER-1370-30</b>	<b>103047636</b>
			High range	30 mm	1370 mm	4 ... 20 m	<b>EX-SLC440-ER-1370-30-H</b>	<b>103047643</b>
Type 4	Safety light grids <b>EX-SLG</b>	EX- SLG440		2 beams	500 mm	0,3 ... 12 m	<b>EX-SLG440-ER-0500-02</b>	<b>103047621</b>
			High range	2 beams	500 mm	4 ... 20 m	<b>EX-SLG440-ER-0500-02-H</b>	<b>103047625</b>
				3 beams	800 mm	0,3 ... 12 m	<b>EX-SLG440-ER-0800-03</b>	<b>103047622</b>
			High range	3 beams	800 mm	4 ... 20 m	<b>EX-SLG440-ER-0800-03-H</b>	<b>103047626</b>
				4 beams	900 mm	0,3 ... 12 m	<b>EX-SLG440-ER-0900-04</b>	<b>103047624</b>
			High range	4 beams	900 mm	4 ... 20 m	<b>EX-SLG440-ER-0900-04-H</b>	<b>103047627</b>

<sup>1)</sup> The height depends on the protection field height

### Key

- BC = Beam coding
- DQ = Double acknowledgement/reset
- MS = Multiple scan
- DM = Setting mode
- SI = Start interlock

To get detailed information about the products and certificates, visit [products.schmersal.com](http://products.schmersal.com).

# SAFETY LIGHT GRIDS AND CURTAINS

## SAFETY MONITORING MODULES



■ SRB-E-301MC



■ SRB-E-301ST

### Key Features

- |  |  |
|--|--|
| <ul style="list-style-type: none"> <li>▪ Function STOP 0</li> <li>▪ 1- or 2-channel control</li> <li>▪ Start button / autostart</li> <li>▪ 3 safety contacts</li> <li>▪ 1 auxiliary contact</li> </ul> | <ul style="list-style-type: none"> <li>▪ Function STOP 0</li> <li>▪ 1- or 2-channel control</li> <li>▪ Monitored start button / autostart</li> <li>▪ 3 safety contacts</li> <li>▪ 1 auxiliary contact</li> </ul> |
|--|--|

### Technical features

#### Electrical characteristics

<b>Operating voltage</b>	24 VAC / VDC -20 % / +20 %	24 VAC / VDC -20 % / +20 %
<b>Operating current</b>	0.1 A	0.1 A
<b>Max. switching capacity of the safety contacts</b>	3 x 230 V / 6 A	3 x 230 V / 6 A
<b>of the safe semi-conductor outputs</b>	-	-
<b>of the auxiliary contacts</b>	1 x 24 VDC / 1 A	1 x 24 VDC / 1 A
<b>of the signalling outputs</b>	-	-
<b>Drop-out delay STOP 0</b>	< 10 ms	< 10 ms
<b>STOP 1</b>	-	-
<b>Mechanical data</b>		
<b>With removable terminals</b>	■	■
<b>Dimensions (H x W x D)</b>	22.5 x 98 x 115 mm	22.5 x 98 x 115 mm
<b>Environmental conditions</b>		
<b>Ambient temperature</b>	-25 °C ... +60 °C	-25 °C ... +60 °C

### Safety classification

<b>Standards</b>	EN ISO 13849-1, IEC 61508	EN ISO 13849-1, IEC 61508
<b>PL/SIL</b>	e/3	e/3
<b>Control category</b>	4	4
<b>PFH</b>	< 6 x 10 <sup>-9</sup> /h	< 1.25 x 10 <sup>-8</sup> /h
<b>Certificates</b>	TÜV, cULus, CCC, EAC	TÜV, cULus, CCC, EAC



To get detailed information about the products and certificates, visit [products.schmersal.com](http://products.schmersal.com).



■ SRB-E-204ST



■ SRB-E-302ST



■ SRB202MSL

<ul style="list-style-type: none"><li>▪ Input expander module</li><li>▪ Monitoring of 4 sensors</li><li>▪ Start button / autostart</li><li>▪ 2 safety outputs</li><li>▪ 4 signalling outputs</li></ul>	<ul style="list-style-type: none"><li>▪ Function STOP 0</li><li>▪ Monitoring of 2 sensors</li><li>▪ 1- or 2-channel control</li><li>▪ Start button / autostart</li><li>▪ 2 safety contacts, 1 safety output</li><li>▪ 2 signalling outputs</li></ul>	<ul style="list-style-type: none"><li>▪ Muting function</li><li>▪ 2 or 4 muting sensors</li><li>▪ Lamp current monitoring</li><li>▪ 2 safety contacts</li><li>▪ 2 signalling outputs</li></ul>
--	--	--

24 VDC -20 % / +20 % 0.125 A	24 VDC -20 % / +20 % 0.125 A	24 VDC -15% / +20% 0.24 A
-	2 x 230 V / 6 A	2 x 24 VDC / 4 A
2 x 24 V / 2 A	1 x 24 V / 2 A	-
-	-	-
4 x 24 V / 100 mA < 10 ms	2 x 24 V / 100 mA < 10 ms	24 VDC / 0.05 A < 20 ms
-	-	-
■	■	■
22.5 x 98 x 115 mm	22.5 x 98 x 115 mm	45 x 100 x 121 mm
-25 °C ... +60 °C	-25 °C ... +60 °C	-25 °C ... +45 °C

EN ISO 13849-1, IEC 61508 e/3 4 $< 2.66 \times 10^{-9}/h$ TÜV, cULus, CCC, EAC	EN ISO 13849-1, EN IEC 61508, EN IEC 62061 e/3 4 $< 1.25 \times 10^{-8}/h; < 2.66 \times 10^{-9}/h$ TÜV, cULus, CCC, EAC	EN ISO 13849-1, IEC 61508 e/3 4 $< 2.0 \times 10^{-8}/h$ cULus, EAC
--	---	---

# SAFETY LIGHT GRIDS AND CURTAINS

## ACCESSORIES

Protective enclosure SG5/SG6	Protective cover SGS5/SGS6	Tilted mirror for SG5/SG6
		
<ul style="list-style-type: none"> <li>■ Protective enclosure for SLC/SLG</li> <li>■ Protection field heights to 970 mm: <b>SG5</b> to 1930 mm: <b>SG6</b></li> </ul> <p><b>103001594</b> <b>103001596</b></p>	<ul style="list-style-type: none"> <li>■ Protective cover for SG5 and SG6</li> <li>■ Protection field heights to 970 mm: <b>SGS5</b> to 1930 mm: <b>SGS6</b></li> </ul> <p><b>103001595</b> <b>103001597</b></p>	<ul style="list-style-type: none"> <li>■ Tilted mirror for SG5 and SG6 1000 mm: <b>ULS-SG-1000</b> 1870 mm: <b>ULS-SG-1870</b></li> </ul> <p><b>103002489</b> <b>103016046</b></p>
Mounting post MST	Deflecting mirror ULS-M	Aligning aid EA5
		
<ul style="list-style-type: none"> <li>■ Mounting stands</li> <li>■ Base L/W 135x135 mm</li> <li>■ Height 500 – 2000 mm</li> </ul>	<ul style="list-style-type: none"> <li>■ Deflecting mirror series M</li> <li>■ Mirror height 350 – 1870 mm</li> <li>■ Included in delivery: tilted mirror and qty. 2 mounting brackets</li> </ul>	<ul style="list-style-type: none"> <li>■ Alignment kit, laser beam 30 m</li> <li>■ Alignment kit for all SLC/SLG series</li> </ul> <p><b>EA5</b> <b>101211456</b></p>
Parametrisation cable KA-0974	Parametrisation cable KA-0896	Parametrisation cable KA-0975
		
<ul style="list-style-type: none"> <li>■ Parametrisation cable for SLC/SLG <b>440</b></li> <li>■ Y-splitter, M12, 8-pole with P-button</li> </ul> <p><b>KA-0974</b> <b>101217615</b></p>	<ul style="list-style-type: none"> <li>■ Parametrisation cable for SLC/SLG <b>440COM</b> + SLC/SLG <b>240COM</b></li> <li>■ Y-splitter M12, 5-pole with command device</li> </ul> <p><b>KA-0896</b> <b>101030161</b></p>	<ul style="list-style-type: none"> <li>■ Parametrisation cable for SLC/SLG <b>440-AS</b></li> <li>■ Y-splitter M12, 8-pole with command device</li> </ul> <p><b>KA-0975</b> <b>103005659</b></p>

Detailed information can be found at [products.schmersal.com](http://products.schmersal.com).

# SAFETY LIGHT GRIDS AND CURTAINS


## ACCESSORIES

Connector plug, 4-pole	Connector plug, 5-pole	Connector plug, 8-pole																														
																																
<ul style="list-style-type: none"> <li>■ Connector plug M12, straight, <b>4 pole</b></li> <li>■ Cable length</li> </ul> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 10%;">5 m</td> <td style="width: 10%;">KA-0804</td> <td style="width: 70%;"></td> </tr> <tr> <td>10 m</td> <td>KA-0805</td> <td>A-K5P-M12-S-G-5M-BK-2-X-A-4-69</td> </tr> <tr> <td>20 m</td> <td>KA-0808</td> <td>A-KSP-M12-S-G-15M-BK-2-X-A-4-69</td> </tr> </table>	5 m	KA-0804		10 m	KA-0805	A-K5P-M12-S-G-5M-BK-2-X-A-4-69	20 m	KA-0808	A-KSP-M12-S-G-15M-BK-2-X-A-4-69	<ul style="list-style-type: none"> <li>■ Connector plug M12, straight, <b>5 pole</b></li> <li>■ Cable length</li> </ul> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 10%;">5 m</td> <td style="width: 10%;">A-K5P-M12-S-G-5M-BK-2-X-A-4-69</td> <td style="width: 70%;"></td> </tr> <tr> <td>10 m</td> <td>A-K5P-M12-S-G-10M-BK-2-X-A-4-69</td> <td>KA-0905</td> </tr> <tr> <td>15 m</td> <td>A-KSP-M12-S-G-15M-BK-2-X-A-4-69</td> <td>KA-0908</td> </tr> </table>	5 m	A-K5P-M12-S-G-5M-BK-2-X-A-4-69		10 m	A-K5P-M12-S-G-10M-BK-2-X-A-4-69	KA-0905	15 m	A-KSP-M12-S-G-15M-BK-2-X-A-4-69	KA-0908	<ul style="list-style-type: none"> <li>■ Connector plug M12, straight, <b>8 pole</b></li> <li>■ Cable length</li> </ul> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 10%;">5 m</td> <td style="width: 10%;">KA-0904</td> <td style="width: 70%;"></td> </tr> <tr> <td>10 m</td> <td>KA-0905</td> <td>KA-0905</td> </tr> <tr> <td>15 m</td> <td>KA-0908</td> <td>KA-0908</td> </tr> </table>	5 m	KA-0904		10 m	KA-0905	KA-0905	15 m	KA-0908	KA-0908			
5 m	KA-0804																															
10 m	KA-0805	A-K5P-M12-S-G-5M-BK-2-X-A-4-69																														
20 m	KA-0808	A-KSP-M12-S-G-15M-BK-2-X-A-4-69																														
5 m	A-K5P-M12-S-G-5M-BK-2-X-A-4-69																															
10 m	A-K5P-M12-S-G-10M-BK-2-X-A-4-69	KA-0905																														
15 m	A-KSP-M12-S-G-15M-BK-2-X-A-4-69	KA-0908																														
5 m	KA-0904																															
10 m	KA-0905	KA-0905																														
15 m	KA-0908	KA-0908																														
Connector plug, 12-pole	Protective enclosure SH – stainless steel (440)	Protective enclosure PH – polyamide (440)																														
																																
<ul style="list-style-type: none"> <li>■ Connector plug M12, straight, <b>12 pole</b></li> <li>■ Cable length</li> </ul> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 10%;">5 m</td> <td style="width: 10%;">KA-0980</td> <td style="width: 70%;">101213352</td> </tr> <tr> <td>10 m</td> <td>KA-0981</td> <td>101213353</td> </tr> </table>	5 m	KA-0980	101213352	10 m	KA-0981	101213353	<ul style="list-style-type: none"> <li>■ Protective enclosure IP69</li> </ul> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 10%;">to 490 mm:</td> <td style="width: 10%;">SH-440-ER-01</td> <td style="width: 70%;">103026832</td> </tr> <tr> <td>to 890 mm:</td> <td>SH-440-ER-02</td> <td>103026833</td> </tr> <tr> <td>to 1290 mm:</td> <td>SH-440-ER-03</td> <td>103026834</td> </tr> <tr> <td>to 1770 mm:</td> <td>SH-440-ER-04</td> <td>103026835</td> </tr> </table>	to 490 mm:	SH-440-ER-01	103026832	to 890 mm:	SH-440-ER-02	103026833	to 1290 mm:	SH-440-ER-03	103026834	to 1770 mm:	SH-440-ER-04	103026835	<ul style="list-style-type: none"> <li>■ Protective enclosure IP69</li> </ul> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 10%;">to 490 mm:</td> <td style="width: 10%;">PH-440-ER-01</td> <td style="width: 70%;">103026836</td> </tr> <tr> <td>to 890 mm:</td> <td>PH-440-ER-02</td> <td>103026837</td> </tr> <tr> <td>to 1290 mm:</td> <td>PH-440-ER-03</td> <td>103026838</td> </tr> <tr> <td>to 1770 mm:</td> <td>PH-440-ER-04</td> <td>103026839</td> </tr> </table>	to 490 mm:	PH-440-ER-01	103026836	to 890 mm:	PH-440-ER-02	103026837	to 1290 mm:	PH-440-ER-03	103026838	to 1770 mm:	PH-440-ER-04	103026839
5 m	KA-0980	101213352																														
10 m	KA-0981	101213353																														
to 490 mm:	SH-440-ER-01	103026832																														
to 890 mm:	SH-440-ER-02	103026833																														
to 1290 mm:	SH-440-ER-03	103026834																														
to 1770 mm:	SH-440-ER-04	103026835																														
to 490 mm:	PH-440-ER-01	103026836																														
to 890 mm:	PH-440-ER-02	103026837																														
to 1290 mm:	PH-440-ER-03	103026838																														
to 1770 mm:	PH-440-ER-04	103026839																														
Protective enclosure PH – polyamide (440COM)	Protective enclosure PT with IP67 protection	Test rod PLS-01/-02																														
																																
<ul style="list-style-type: none"> <li>■ Protective enclosure IP69</li> </ul> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 10%;">to 490 mm:</td> <td style="width: 10%;">PH-COM4-ER-01</td> <td style="width: 70%;">103026840</td> </tr> <tr> <td>to 890 mm:</td> <td>PH-COM4-ER-02</td> <td>103026841</td> </tr> <tr> <td>to 1290 mm:</td> <td>PH-COM4-ER-03</td> <td>103026843</td> </tr> <tr> <td>to 1770 mm:</td> <td>PH-COM4-ER-04</td> <td>103026844</td> </tr> </table>	to 490 mm:	PH-COM4-ER-01	103026840	to 890 mm:	PH-COM4-ER-02	103026841	to 1290 mm:	PH-COM4-ER-03	103026843	to 1770 mm:	PH-COM4-ER-04	103026844	<ul style="list-style-type: none"> <li>■ Protective enclosure PT with IP67 protection for SLC440 170 – 1770 mm: <b>PT-440-ER-xxxx</b></li> <li>■ Protective enclosure without IP69 protection for SLC440COM 330 – 1770 mm: <b>PT-COM4-ER-xxxx</b></li> </ul>	<ul style="list-style-type: none"> <li>■ Test rod</li> </ul> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 10%;">30 mm diameter:</td> <td style="width: 10%;">PLS-01</td> <td style="width: 70%;">101207768</td> </tr> <tr> <td>14 mm diameter:</td> <td>PLS-02</td> <td>101207769</td> </tr> </table>	30 mm diameter:	PLS-01	101207768	14 mm diameter:	PLS-02	101207769												
to 490 mm:	PH-COM4-ER-01	103026840																														
to 890 mm:	PH-COM4-ER-02	103026841																														
to 1290 mm:	PH-COM4-ER-03	103026843																														
to 1770 mm:	PH-COM4-ER-04	103026844																														
30 mm diameter:	PLS-01	101207768																														
14 mm diameter:	PLS-02	101207769																														

Detailed information can be found at [products.schmersal.com](http://products.schmersal.com).

# SAFETY LIGHT GRIDS AND CURTAINS

## ACCESSORIES – MUTING
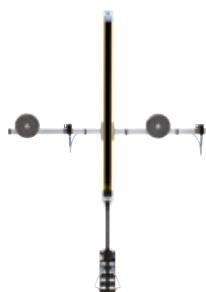
<b>MCU-02</b>	<b>103005572</b>	<b>S100-PR</b>	<b>103040805</b>	<b>KA-0976</b>	<b>103005575</b>
					
<ul style="list-style-type: none"> <li>■ Muting connection unit</li> <li>■ Release/override, transmitter unit (E), up to 4 muting sensors, muting lamp</li> </ul>		<ul style="list-style-type: none"> <li>■ Muting sensor M8, 4-pole</li> <li>■ Reflection light barrier</li> <li>■ Range 0.1 ... 6.0 m</li> <li>■ Mounting brackets not included in the delivery</li> </ul>		<ul style="list-style-type: none"> <li>■ Programming cable for SLC/SLG445</li> <li>■ P-button with connector plug M12, 12-pole</li> </ul>	
<b>MUT-SET-L-01</b>	<b>103006073</b>	<b>MUT-SET-L-02</b>	<b>103006074</b>	<b>MUT-SET-T-01</b>	<b>103006075</b>
					
<ul style="list-style-type: none"> <li>■ Muting set T-version for mounting to the assembly stand MST</li> <li>■ Set complete with 2 muting sensors, MCU-02, attachment and cable</li> <li>■ Set without SLC/SLG445 and MST</li> </ul>		<ul style="list-style-type: none"> <li>■ Muting set L-version for mounting to the sensor profile</li> <li>■ Set complete with 2 muting sensors, MCU-02, attachment and cable</li> <li>■ Set without SLC/SLG445 and MST</li> </ul>		<ul style="list-style-type: none"> <li>■ Muting set T-version for mounting to the assembly stand MST</li> <li>■ Set complete with 4 muting sensors, MCU-02, attachment and cable</li> <li>■ Set without SLC/SLG445 and MST</li> </ul>	
<b>MUT-SET-T-02</b>	<b>103006076</b>	<b>MUT-SET-T-03</b>	<b>103009195</b>	<b>MUT-SET-T-04</b>	<b>103012263</b>
					
<ul style="list-style-type: none"> <li>■ Muting set T-version for mounting to the sensor profile</li> <li>■ Set complete with 4 muting sensors, MCU-02, attachment and cable</li> <li>■ Set without SLC/SLG445 and MST</li> </ul>		<ul style="list-style-type: none"> <li>■ Muting set T-version for mounting to the sensor profile</li> <li>■ Set complete with 2 muting sensors, MCU-02, attachment and cable</li> <li>■ Set without SLC/SLG445 and MST</li> </ul>		<ul style="list-style-type: none"> <li>■ Muting set T-version for mounting to the assembly stand MST</li> <li>■ Set complete with 2 muting sensors, MCU-02, attachment and cable</li> <li>■ Set without SLC/SLG445 and MST</li> </ul>	

Detailed information can be found at [products.schmersal.com](http://products.schmersal.com).

# SAFETY LIGHT GRIDS AND CURTAINS

## ACCESSORIES

<b>SET-MSEN-01</b>	<b>103009196</b>	<b>SF5/6</b>	<b>103009789</b>	<b>ProLoop 2</b>	<b>103009788</b>
 <ul style="list-style-type: none"> <li>Muting set with 2 muting sensors S100-PR, 2 reflectors RD-83</li> <li>With mounting angle kit MS-ST-505 and MS-1200</li> </ul>		 <ul style="list-style-type: none"> <li>Induction loop with 5 m circumference and 6 m connection cable for Pro Loop 2</li> </ul>		 <ul style="list-style-type: none"> <li>Evaluation unit for induction loops SF5/6</li> </ul>	
<b>MS-1073</b>	<b>101207805</b>	<b>MS-1100</b>	<b>101216833</b>	<b>MS-1110</b>	<b>101216834</b>
 <ul style="list-style-type: none"> <li>Mounting kit for deflecting mirror ULS-M</li> <li>Set with 2 pieces</li> </ul>		 <ul style="list-style-type: none"> <li>Mounting kit for SLC/SLG440COM, SLC/SLG440 and SLC/SLG445</li> <li>Included in delivery: Angle with screws</li> <li>Set with 4 pieces</li> </ul>		 <ul style="list-style-type: none"> <li>Mounting kit – Centre fixing for SLC/SLG440COM, SLC/SLG440 and SLC/SLG445</li> <li>Set with 2 pieces</li> </ul>	
<b>SMA-80</b>	<b>101150262</b>	<b>BF-SMA-80-1</b>	<b>101150263</b>	<b>BF-SMA-80-2</b>	<b>101150264</b>
 <ul style="list-style-type: none"> <li>Tilted mirror for SLB series</li> <li>Height: 80 mm</li> <li>Width: 120 mm</li> </ul>		<ul style="list-style-type: none"> <li>Mounting bracket for attachment of tilted mirror SMA-80 (horizontal tilt)</li> </ul>		<ul style="list-style-type: none"> <li>Mounting bracket for attachment of tilted mirror SMA-80 (vertical tilt)</li> </ul>	

Detailed information can be found at [products.schmersal.com](http://products.schmersal.com).



## excellence in safety

tec.nicum is the Schmersal Group's business unit for solutions and services related to machine, plant and occupational safety.

Schmersal restructured its service business in 2024. The range of safety services offered by tec.nicum has been significantly expanded – particularly with regard to digitalisation and complete solutions for machine safety – and the global activities and expertise have been more closely integrated.

In April 2024, Schmersal founded tec.nicum – Solutions & Services GmbH as a new subsidiary, which also incorporated omnicon engineering GmbH, which Schmersal had already acquired in 2019. The headquarters of the new subsidiary is located in Kirkel-Limbach, Germany.

The four pillars on which tec.nicum's offering has been built to date – academy, consulting, engineering and integration – have been supplemented by two more: digitalisation and outsourcing.

**digitalisation:** tec.nicum is increasingly offering newly developed software solutions, such as a new tool for carrying out risk assessments, as well as new digital technologies such as cloud solutions, IIoT applications, digitalised lockout-tagout procedures and energy management tools.

**outsourcing:** tec.nicum offers companies the opportunity to completely outsource all tasks related to machine safety, from the planning and installation of control cabinets to the design of holistic safety solutions. tec.nicum provides the user with ready-to-connect plug & play solutions.

Thanks to its worldwide consultancy network, tec.nicum services are available around the globe. tec.nicum provides customers with competent, product- and manufacturer-neutral advice and supports them in the safety-related design of their machines and production lines.

# tec.nicum

Schmersal Group

### tec.nicum – Solutions & Services GmbH

#### Kirkel office

Friedrichstraße 65  
66459 Kirkel-Limbach

Phone: +49 6841 77780-31  
E-mail: [info-en@tecnicum.com](mailto:info-en@tecnicum.com)  
Web: [www.tecnicum.com](http://www.tecnicum.com)

### tec.nicum – Solutions & Services GmbH

#### Wuppertal office

Möddinghofe 30  
42279 Wuppertal  
Phone: +49 202 6474-932  
E-mail: [info-en@tecnicum.com](mailto:info-en@tecnicum.com)  
Web: [www.tecnicum.com](http://www.tecnicum.com)





<p><b>academy</b></p> <p><b>Education center</b></p> <ul style="list-style-type: none"> <li>■ Training courses</li> <li>■ Customer-specific trainings</li> <li>■ In-house seminars</li> <li>■ Certified courses (mce.expert and FSE)</li> </ul>	<p><b>consulting</b></p> <p><b>Analysis and documentation</b></p> <ul style="list-style-type: none"> <li>■ Technical support</li> <li>■ Risk assessment</li> <li>■ CE conformity assessment</li> <li>■ Evaluation of machines and production lines</li> <li>■ Reports</li> </ul>
<p><b>engineering</b></p> <p><b>Planning and design</b></p> <ul style="list-style-type: none"> <li>■ Technical project planning</li> <li>■ Conceptual project development</li> <li>■ Electrical and mechanical design</li> <li>■ Executive project management</li> </ul>	<p><b>integration</b></p> <p><b>Practical application</b></p> <ul style="list-style-type: none"> <li>■ Turnkey approach</li> <li>■ Installation</li> <li>■ Retrofit</li> </ul>
<p><b>digitalisation</b></p> <p><b>Software integration</b></p> <ul style="list-style-type: none"> <li>■ tec.ps (Product Service System)</li> <li>■ tec.ssm (Schmersal Smart Machine)</li> <li>■ tec.cvs (AI and Computational Vision Solutions)</li> <li>■ tec.dloto (Digital Lockout Tagout)</li> <li>■ tec.ems (Energy Monitoring System)</li> </ul>	<p><b>outsourcing</b></p> <p><b>Serial solutions</b></p> <ul style="list-style-type: none"> <li>■ Plug &amp; Play products</li> <li>■ Engineer to Order projects</li> <li>■ Systems and cabinets</li> </ul>

# tec.nicum

The range of services offered by tec.nicum comprises six segments: academy (knowledge transfer), consulting (advisory services), engineering (technical planning), integration (execution and implementation), digitalisation (software solutions and new digital technologies) as well as outsourcing (complete solutions).

## Addresses

- **Hauptsitz – Headquarters**  
**K.A. Schmersal GmbH & Co. KG**  
42232 Wuppertal  
Möddinghofe 30  
42279 Wuppertal  
Phone: +49 202 6474-0  
Fax: +49 202 6474-100  
info@schmersal.com  
www.schmersal.com

### GERMANY

- **Berlin**  
**KSA Komponenten der Steuerungs- und Automatisierungstechnik GmbH**  
Pankstraße 8-10 / Aufg. L  
13127 Berlin  
Phone: +49 30 474824-00  
Fax: +49 30 474824-05  
info@ksa-gmbh.de  
www.ksa-gmbh.de

- **Hannover**  
**ELTOP GmbH**  
Robert-Bosch-Straße 8  
30989 Gehrden  
Phone: +49 51 089273-20  
Fax: +49 51 089273-21  
eltop@eltop.de  
www.eltop.de

- **Köln**  
**Stollenwerk**  
**Technisches Büro GmbH**  
Scheuermühlenstraße 40  
51147 Köln  
Phone: +49 2203 96620-0  
Fax: +49 2203 96620-30  
info@stollenwerk.de  
www.stollenwerk.de

- **Siegen**  
**Siegfried Klein**  
**Elektro-Industrie-Vertretungen**  
In der Steinwiese 46  
57074 Siegen  
Phone: +49 271 6778  
Fax: +49 271 6770  
info@sk-elekrotechnik.de  
www.sk-elekrotechnik.de

- **Saarland**  
**Herbert Neundörfer Werksvertretungen GmbH & Co. KG**  
Am Campus 5  
66287 Göttelborn  
Phone: +49 6825 9545-0  
Fax: +49 6825 9545-99  
info@herbert-neundoerfer.de  
www.herbert-neundoerfer.de

- **Bayern Süd**  
**INGAM Ing. Adolf Müller GmbH**  
**Industrievertretungen**  
Elly-Staegmeyr-Straße 15  
80999 München  
Phone: +49 89 8126044  
Fax: +49 89 8126925  
info@ingam.de  
www.ingam.de

### EUROPE

- **Austria – Österreich**  
**AVS-Schmersal Vertriebs GmbH**  
Biróstraße 17  
1232 Wien  
Phone: +43 1 61028-0  
Fax: +43 1 61028-130  
info@avs-schmersal.at  
www.avs-schmersal.at

- **Belgium – Belgien**  
**Schmersal Belgium NV/SA**  
Nieuwlandlaan 73  
Industriezone B 413  
3200 Aarschot  
Phone: +32 16 5716-18  
Fax: +32 16 5716-20  
info@schmersal.be  
www.schmersal.be
- **Bosnia and Herzegovina**  
**Tipteh d.o.o. Sarajevo**  
Ramiza Salčina 246  
71000 Sarajevo  
Phone: +387 33 452427  
info@tipteh.ba  
www.tipteh.com/ba
- **Bulgaria – Bulgarien**  
**STRATONS**  
Han Omurtag 33 str. Office 2  
7002 Ruse  
Phone: +359 879 060788  
Phone: +359 883 474148  
office@stratons.bg  
www.stratons.bg
- **Croatia – Kroatien**  
**Tipteh Zagreb d.o.o.**  
Štrokinec 7  
10000 Zagreb  
Phone: +385 1 3141550  
tipteh@tipteh.hr  
www.tipteh.com/hr
- **Czech Republic – Tschech. Republik**  
**Mercom Componenta spol. s.r.o.**  
Bechyňská 640  
199 00 Praha 9 – Letňany  
Phone: +420 267 314640  
mercom@mercom.cz  
www.mercom.cz  
www.schmersal.cz
- **Denmark – Dänemark**  
**Schmersal Danmark A/S**  
Arnold Nielsens Boulevard 72  
2650 Hvidovre  
Phone: +45 702090-27  
Fax: +45 702090-37  
info-dk@schmersal.com  
www.schmersal.dk
- **Estonia – Estland**  
**Schmersal Finland Oy**  
Äyrítie 12 B  
01510 Vantaa  
Phone: +358 207199430  
Fax: +358 935052660  
info@schmersal.fi  
www.schmersal.fi
- **Finland: Schmersal Finland Oy**  
Äyrítie 12 B  
01510 Vantaa  
Phone: +358 207199430  
Fax: +358 935052660  
advancetec@advancetec.fi  
www.schmersal.fi
- **France – Frankreich**  
**Schmersal France**  
BP 18, 38181 Seyssins cedex  
8 Rue Raoul Follereau  
38180 Seyssins  
Phone: +33 4 76842320  
technique@schmersal.com  
info-fr@schmersal.com  
www.schmersal.fr
- **Greece – Griechenland**  
**Kalamarakis Automation SA**  
PO Box 46566 Athens  
13671 Chamomilos Acharnes  
Athens  
Phone: +30 210 2406000-6  
Fax: +30 210 2406007  
info@ksa.gr  
www.ksa.gr
- **Hungary – Ungarn**  
**NTK Ipari-Elektronikai és Kereskedelmi Kft.**  
Gesztenyefa u. 4.  
9027 Győr  
Phone: +36 96 523268  
Fax: +36 96 430011  
info@ntk-kft.hu  
www.ntk-kft.hu
- **Iceland – Island**  
**Reykjafell Ltd.**  
Skipholti 35  
125 Reykjavík  
Phone: +354 5 8860-10  
Fax: +354 5 8860-88  
reykjafell@reykjafell.is  
www.reykjafell.is
- **Italy – Italien**  
**SCHMERSAL ITALIA S.r.l.**  
Via Molino Vecchio, 206  
25010 Borgosatollo (BS)  
Phone: +39 030 25074-11  
Fax: +39 030 25074-31  
info-it@schmersal.com  
www.schmersal.it
- **Latvia – Lettland**  
**BOPALIT**  
145 Baltų pr., Kaunas  
LT-47125 Lietuva  
Phone: +370 37 298989  
info@bopalit.lt  
www.bopalit.lt
- **Lithuania – Litauen**  
**BOPALIT**  
145 Baltų pr., Kaunas  
LT-47125 Lietuva  
Phone: +370 37 298989  
info@bopalit.lt  
www.bopalit.lt
- **Luxembourg – Luxemburg**  
**Schmersal Belgium NV/SA**  
info@schmersal.be  
www.schmersal.be
- **Macedonia – Mazedonien**  
**Tipteh d.o.o. Skopje**  
Bul. Partizanski odredi 80  
lok.5, 1000 Skopje  
Phone: +389 23 174197  
info@tipteh.mk  
www.tipteh.com/mk
- **Netherlands – Niederlande**  
**Schmersal Nederland B.V.**  
Lorentzstraat 31  
3846 AV Harderwijk  
Phone: +31 341 432525  
Fax: +31 341 425257  
info-nl@schmersal.com  
www.schmersal.nl
- **Norway – Norwegen**  
**Schmersal Norge Nuf**  
Strøket 8  
1383 Asker  
Phone: +47 220600-70  
Fax: +47 220600-80  
info-no@schmersal.com  
www.schmersal.no
- **Poland – Polen**  
**Schmersal Poland Sp. z o.o.**  
ul. Bałtowa 29  
02-867 Warszawa  
Phone: +48 22 2508800  
Fax: +48 22 8168580  
info@schmersal.pl  
www.schmersal.pl
- **Portugal – Portugal**  
**Schmersal Ibérica, S.L.**  
Apartado 30  
2626-909 Póvoa de Sta. Iria  
Phone: +351 308 800933  
info-pt@schmersal.com  
www.schmersal.pt
- **Romania – Rumänien**  
**SC SENSO DATA SRL**  
Autogarii 16  
550135 Sibiu  
Phone: +4 0770 796640  
office@sensodata.ro  
www.sensodata.ro
- **Serbia – Serbien**  
**Tipteh d.o.o. Serbia**  
Ulica Moše Pijade 17A,  
Vrćin, Beograd 11224  
Phone: +3 11 8053-628  
Fax: +3 11 8053-045  
office@tipteh.rs  
www.tipteh.rs
- **Slovakia – Slowakei**  
**Mercom Componenta spol. s.r.o.**  
Bechyňská 640  
199 00 Praha 9 – Letňany  
Phone: +420 267 314640  
mercom@mercom.cz  
www.mercom.cz  
www.schmersal.cz
- **Slovenia – Slowenien**  
**Tipteh d.o.o.**  
Ulica Ivana Roba 23  
1000 Ljubljana  
Phone: +386 1 20051-50  
info@tipteh.si  
tipteh.com/si
- **Spain – Spanien**  
**Schmersal Ibérica, S.L.**  
Rambla P. Catalanes, Nº 12  
08800 Vilanova i la Geltrú  
Phone: +34 938 970906  
info-es@schmersal.com  
www.schmersal.es
- **Sweden – Schweden**  
**Schmersal Nordiska AB**  
F O Peterssons gata 28  
421 31 Västra Frölunda  
Phone: +46 31 33835-00  
Fax: +46 31 33835-39  
info-se@schmersal.com  
www.schmersal.se
- **Switzerland – Schweiz**  
**Schmersal Schweiz AG**  
Moosmattstraße 3  
8905 Arni  
Phone: +41 43 31122-33  
Fax: +41 43 31122-44  
info-ch@schmersal.ch  
www.schmersal.ch
- **Turkey – Türkei**  
**Schmersal Turkey Otomasyon Ürünleri ve Hizmetleri Ltd. Şti.**  
Atatürk Mah. Ataşehir Bulvarı No:5  
Gardenya Plaza 5 Kat:2 Daire:2  
34758 Ataşehir / İstanbul  
Phone: +90 532 111 27 16  
info-tr@schmersal.com  
www.schmersal.com.tr
- **Ukraine – Ukraine**  
**VBR Ltd.**  
41, Demiyivska Str.  
03040 Kyiv Ukraine  
Phone: +38 044 2590955  
Fax: +38 044 2590955  
office@vbr.com.ua  
www.vbr-electric.com.ua/schmersal
- **United Kingdom – Großbritannien**  
**Schmersal Ltd.**  
Sparrowhawk Close  
Unit 1, Beauchamp Business Centre  
Enigma Business Park  
Malvern, Worcestershire WR14 1GL  
Phone: +44 1684 571980  
Fax: +44 1684 560273  
uksupport@schmersal.com  
www.schmersal.co.uk

## Addresses

### WORLDWIDE

- **Argentina – Argentinien**  
**Condelectric S.A.**  
info@condelectric.com.ar  
www.condelectric.com.ar  
**Dinatex SA**  
electrica@dinatecnica.com.ar  
www.dinatecnica.com.ar  
**Electro Dos Materiales Electricos S.A.**  
ventas@electro-dos.com.ar  
www.electro-dos.com.ar
- **Australia – Australien**  
**IPD Group Ltd.**  
43 Newton Road  
Wetherill Park, NSW 2164  
Phone: +61 1300 556 601  
Fax: +61 1300 550 187  
customerservice@ipd.com.au  
www.ipdgroup.com.au
- **Belarus – Weißrussland**  
**ZAO Eximelektro**  
Ul. Churlionisa, 26-169  
Minskaja Woblasz 220045  
Phone: +375 17 37344-11  
Fax: +375 17 37344-22  
info@exim.by  
www.exim.by
- **Bolivia – Bolivien**  
**International Fil-Parts**  
3er. Anillo, 1040, Frente al Zoo  
Santa Cruz de la Sierra  
Phone: +591 3 342-9900  
Fax: +591 3 342-3637  
presidente@filparts.com.bo  
www.filparts.com.bo
- **Brazil – Brasilien**  
**ACE Schmersal**  
**Eletroeletrônica Industrial Ltda.**  
Av. Brasil, 815 – Jardim Esplanada  
CEP: 18557-646, Boituva / SP  
Phone: +55 15 3263-9800  
Fax: +55 15 3263-9899  
export@schmersal.com.br  
www.schmersal.com.br
- **Canada – Kanada**  
**Schmersal Canada, LTD**  
29 Centennial Road, Unit 1  
Orangeville ON L9W 1R1  
Phone: +1 519 307-7540  
Fax: +1 519 307-7543  
salescanada@schmersal.com
- **Chile – Chile**  
**Vitel S.A.**  
francisco@vitel.cl  
www.vitel.cl  
**Electric Parts**  
asepulveda@eparts.cl  
www.eparts.cl  
**Instrutec Ltda.**  
gcaceres@instrutec.cl  
www.instrutec.cl  
**Soltex Chile S.A.**  
central@soltex.cl  
www.soltex.com.cl
- **PR China – VR China**  
**Schmersal Industrial**  
**Switchgear (Shanghai) Co. Ltd.**  
Cao Ying Road 3336, Qingpu  
201712 Shanghai  
Phone: +86 21 637582-87  
Fax: +86 21 637582-97  
sales@schmersal.com.cn  
www.schmersal.com.cn
- **Colombia – Kolumbien**  
**Cimpex Ltda.**  
jjaramillo@cimpex.co  
www.cimpex.co  
**Dempro S.A.S.**  
info@dempro.co  
www.dempro.co  
**SAMCO Ingeniería S.A.S.**  
jkemmerer@samcoingenieria.com  
www.samcoingenieria.com  
**Potencia y Tecnología**  
ventas@potenciaytecnologia.com  
www.potenciaytecnologia.com
- **Costa Rica – Costa Rica**  
**Euro-Automation-Tec, S.A.**  
eurotec.jhtg@yahoo.com
- **Ecuador – Ecuador**  
**SENSORTEC S.A.**  
Phone: +593 02 604-3230  
ventas@sensorotecsa.com  
www.sensorotecsa.com
- **Egypt – Ägypten**  
**Schmersal Middle East Industrial Equipment Trading LLC**  
ssambandan@schmersal.com  
www.schmersal.ae  
**Nile for Engineering and Trading**  
m.alkady@nile-egy.com
- **El Salvador – El Salvador**  
**PRESTELECTRO**  
david.palacios@prestelectro.com  
www.prestelectro.com
- **Guatemala – Guatemala**  
**PRESTELECTRO**  
david.palacios@prestelectro.com  
www.prestelectro.com
- **India – Indien**  
**Schmersal India Pvt. Ltd.**  
Plot No-G, 7/1, Ranjangaon MIDC,  
Taluka Shirur, District Pune 412220  
Phone: +91 21 38614700  
Fax: +91 20 66861114  
info-in@schmersal.com  
www.schmersal.in
- **Indonesia – Indonesien**  
**Schmersal (Thailand) Co. Ltd.**  
info@schmersal.co.th  
www.schmersal.co.th
- **Israel – Israel**  
**A.U. Shay Ltd.**  
P.O. Box 10049  
Imber St 23  
Petach Tikva, 49222 Israel  
Phone: +972 3923-3601  
Fax: +972 3923-4601  
shay@uriel-shay.com  
www.uriel-shay.com
- **Japan – Japan**  
**Schmersal Japan KK**  
Shin-yokohama Dai 3 Tosho Bldg.  
3-9-5 Shin-yokohama, Kohoku-ku,  
Yokohama 222-0033  
Phone: +81 45 476-5777  
Fax: +81 45 476-5778  
info@schmersal.co.jp  
www.schmersal.co.jp
- **Korea – Korea**  
**Mahani Electric Co. Ltd.**  
20, Gungmal-ro, Gwacheon-si,  
Gyeonggi-do 427-060  
Phone: +82 2 2194-3300  
Fax: +82 2 2194-3397  
yskim@mec.co.kr  
www.mec.co.kr
- **Malaysia – Malaysien**  
**Schmersal (Thailand) Co. Ltd.**  
71, Sukhumvit 52  
Bang Chak Sub District  
Phra Khanong District  
Bangkok 10260  
Phone: +66 2 1171723  
info@schmersal.co.th  
www.schmersal.co.th
- **Mexico – Mexiko**  
**Controles Industriales Mecatronica**  
cimsa1@mecatronica.com  
www.mecatronica.com  
**EACSA, S.A. de C.V.**  
ruben\_angeles@eacsamexico.mx  
www.eacsamexico.mx  
**Electroconstructora del Golfo S.A.**  
ventas.di@electro.mx  
www.electro.mx  
**INNOVATIVE AUTOMOTION SOLUTIONS**  
schmersal@iasmx.com  
www.iasautomation.com.mx  
**ISEL**  
ventas.isel@com.mx  
www.isel.com.mx  
**REINSEL**  
reinsel-ventas@hotmail.com  
**SACCSA, S.A. de C.V.**  
ventas.tecnicas@saccsa.mx  
www.saccsa.mx  
**SEA INDUSTRIAL**  
operaciones@sea-industrial.com  
www.sea-industrial.com  
**SEPIA, S.A. de C.V.**  
alazcano@sepiamx  
www.sepiamx  
**SMART CONTROL, S.A. de C.V.**  
info@smartcontrol.com  
www.smartcontrols.com  
**VGR TECHNOLOGIES**  
alfredo@vgr.com.mx  
www.vgr.com.mx
- **New Zealand – Neuseeland**  
**Hamer Automation**  
85A Falsgrave Street  
Philipstown  
Christchurch  
Phone: +64 3 3662483  
Fax: +64 3 3791379  
sales@hamer.co.nz  
www.hamer.co.nz
- **Pakistan – Pakistan**  
**Schmersal Middle East Industrial Equipment Trading LLC**  
ssambandan@schmersal.com  
www.schmersal.ae
- **Paraguay – Paraguay**  
**Brasguay S.R.L.**  
brasguay@brasguay.com.py  
www.brasguay.com.py
- **Peru – Peru**  
**ACE Schmersal**  
**Eletroeletrônica Industrial Ltda.**  
Av. Brasil, 815 – Jardim Esplanada  
CEP: 18557-646, Boituva / SP  
Phone: +55 15 3263-9800  
Fax: +55 15 3263-9899  
export@schmersal.com.br  
www.schmersal.com.br
- **Philippines – Philippinen**  
**Schmersal (Thailand) Co. Ltd.**  
info@schmersal.co.th  
www.schmersal.co.th  
**Active Control Automation and Industrial Sales Corporation**  
sales@activecontrol.com.ph  
www.activecontrolautomation.com
- **Saudi Arabia – Saudi-Arabien**  
**Schmersal Middle East Industrial Equipment Trading LLC**  
ssambandan@schmersal.com  
www.schmersal.co.th
- **Singapore – Singapur**  
**Schmersal (Thailand) Co. Ltd.**  
info@schmersal.co.th  
www.schmersal.co.th
- **South Africa – Südafrika**  
**A and A Dynamic Distributors (Pty) Ltd.**  
18 to 24 Augusta Road  
Regents Park Estate  
Johannesburg, 2197  
Phone: +27 11 6815900  
sales@adynamic.co.za  
www.adynamic.co.za
- **Taiwan – Taiwan**  
**Golden Leader Camel Ent. Co. Ltd.**  
No. 453-7, Pei Tun Rd.  
Taichung City 40648, Taiwan  
Phone: +866 4 22412989  
Fax: +866 4 22412923  
service@leadercamel.com.tw  
www.leadercamel.com.tw
- **Thailand – Thailand**  
**Schmersal (Thailand) Co. Ltd.**  
71, Sukhumvit 52  
Bang Chak Sub District  
Phra Khanong District  
Bangkok 10260  
Phone: +66 2 1171723  
info@schmersal.co.th  
www.schmersal.co.th
- **United Arab Emirates – Vereinigte Arabische Emirate**  
**Schmersal Middle East Industrial Equipment Trading LLC**  
Post Box No. 410580  
Suntech Tower No. 308, 3rd Floor  
Dubai Silicon Oasis, Dubai  
Phone: +971 4 5775657  
+971 4 5775658  
ssambandan@schmersal.com  
www.schmersal.ae
- **Uruguay – Uruguay**  
**Eneka S.A.**  
info@eneka.com.uy  
www.eneka.com.uy  
**Gliston S.A.**  
colmedo@gliston.com.uy  
www.gliston.com.uy
- **USA – USA**  
**Schmersal, Inc.**  
115 E Stevens Avenue  
Suite 208  
Valhalla, NY 10595  
Phone: +1 914 347-4775  
Fax: +1 914 347-1567  
infousa@schmersal.com  
www.schmersalusa.com
- **Venezuela – Venezuela**  
**EMI Equipos y Sistemas C.A.**  
ventas@emi-ve.com  
www.emi-ve.com
- **Vietnam – Vietnam**  
**Schmersal (Thailand) Co. Ltd.**  
info@schmersal.co.th  
www.schmersal.co.th

# THE SCHMERSAL GROUP

## PROTECTION FOR MAN AND MACHINE

In the demanding field of machine safety, the owner-managed Schmersal Group is one of the international market leaders. The company, which was founded in 1945, has a workforce of about 2,000 people and seven manufacturing sites on three continents along with its own companies and sales partners in more than 60 nations.



Customers of the Schmersal Group include “Global Players” in mechanical engineering and plant manufacturing and operators of machinery. They benefit from the company's extensive expertise as a provider of systems and solutions for machine safety. In addition, Schmersal specialises in various areas including intralogistics, foodstuff production, the packaging industry, machine tool industry, lift switchgear, heavy industry and the automotive industry.

A major contribution to the systems and solutions offered by the Schmersal Group is made by tec.nicum with its comprehensive range of services: Certified Functional Safety Engineers advise machinery manufacturers and machinery operators in all aspects relating to machinery and occupational safety – and do so with product and manufacturer neutrality. Furthermore, they design and realise complex solutions for safety around the world in close collaboration with the clients.

### SAFETY PRODUCTS


- Safety switches and sensors, solenoid interlocks
- Safety controllers and safety relay modules, safety bus systems
- Optoelectronic and tactile safety devices
- Automation technology: position switches, proximity switches

### SAFETY SYSTEMS

- Complete solutions for safeguarding hazard areas
- Individual parametrisation and programming of safety controllers
- Tailor-made safety technology – be it for individual machines or a complex production line
- Industry-specific safety solutions

### SAFETY SERVICES

- tec.nicum academy – Seminars and training
- tec.nicum consulting – Consultancy services
- tec.nicum engineering – Design and technical planning
- tec.nicum integration – Execution and installation
- tec.nicum digitalisation – Software solutions and new digital technologies
- tec.nicum outsourcing – Complete solutions



x.000 / L+W / 04.2023 / Teile-Nr. 101186592 / EN / Ausgabe 16